


OekoSolve

OekoTube micro-dust filter

Technical Data

- Electrical input power: max. 30 W
- Standby: less than 1 W
- High-Voltage: 30 kV
- Availability of a direct power supply: 230 V AC
- Exhaust gas temperature: Unto 400 °C
- Heightening of the chimney: 0.25 m
- Length of the electrode: 1.6 m
- Construction material: Stainless steel
- Efficiency of particulate matter: 95 %

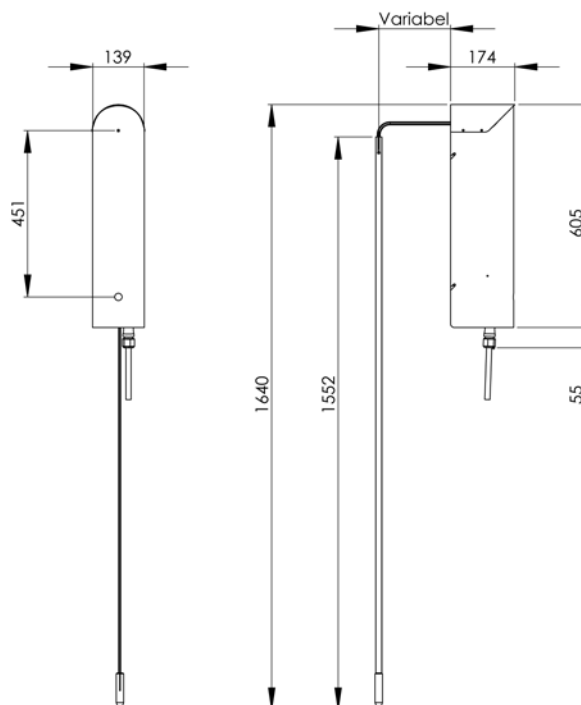


OekoTube Prijzen exclusief BTW

OekoTube	Price	Copper plating
OT-2-S	Euro 1'590	op aanvraag

T-Piece (adapter-piece) prijzen op aanvraag

Chimney Ø mm	Price	Copper plating
130		
150		
180		
200		
250		
300		
350		
400		

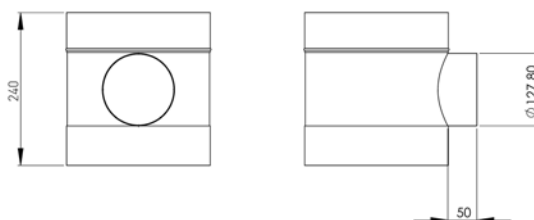

Prijzen exclusief BTW

